



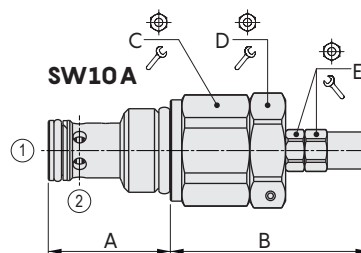

SW..A type sequence valves – 2 way

- Piloted acting
- Spool type
- Valves with kickdown operation
- Mechanical control with screw adjustment
- Different springs available to vary pressure range
- From SAE10 to SAE16 cavities

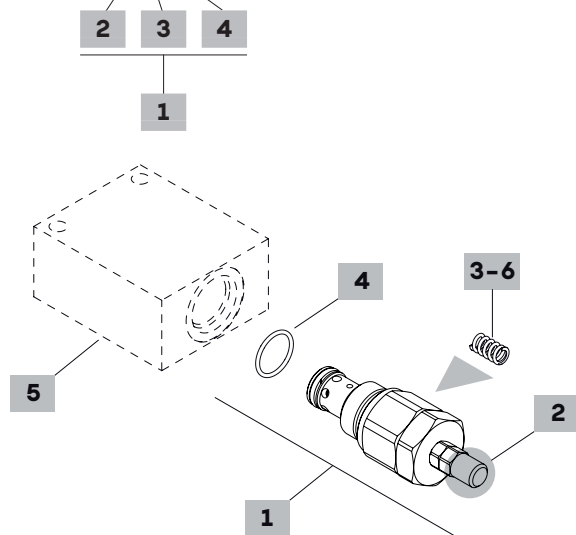
Technical specifications and diagrams are measured with mineral oil of 46 cSt viscosity at 40°C (104°F) temperature.

		SW10A	SW12D	SW16A
Nominal flow		60 l/min (16 US gpm)	100 l/min (26 US gpm)	180 l/min (48 US gpm)
Max. pressure		350 bar (5100 psi)		
Oil leakage	at 80% of max. pressure setting	22 cm ³ /min (1.34 in ³ /min)	50 cm ³ /min (3.05 in ³ /min)	100 cm ³ /min (6.1 in ³ /min)
Fluid		mineral based or synthetic hydraulic fluid with lubricating properties		
Viscosity		10-200 cSt		
Max level of contamination		20/18/14 ISO4406		
Fluid temperature	with NBR seals+Polyurethane with FPM seals	from -25°C (-13°F) to 90°C (194°F) from -20°C (-4°F) to 110°C (230°F)		
Environmental temp. for working conditions		from -20°C (-4°F) to 60°C (140°F)		
Cavity		SAE 10/2	SAE 12/2	SAE 16/2
Weight		0.20 kg (0.44 lb)	0.30 kg (0.66 lb)	0.44 kg (0.97 lb)

NOTE - For different conditions, please contact Walvoil Sales Dpt.



Valve type	A		B		C			D			E											
																						
	mm	in	mm	in		Nm	lbft		Nm	lbft		Nm	lbft		Nm	lbft						
SW10A	32.3	1.27	52.5	2.07	27	50	37	27	50	37	10	6.6	4.87									
SW12D	46	1.81	54.5	2.15	32	80	59	27	50	37	10	6.6	4.87									
SW16A	45.2	1.78	58	2.28	41	100	74	27	50	37	10	6.6	4.87									

Ordering codes and description composition
SW10A/OS2B

3 Pressure range

Standard setting is referred to 5 l/min (1.32 US gpm) flow

TYPE DESCRIPTION

- 1** Pressure range 10÷80 bar (145÷1160 psi); Std. setting 30 bar (435 psi), pressure increase by steps of 10 bar (145 psi) for screw turn
- 2** Pressure range 50÷220 bar (725÷3200 psi); Std. setting 150 bar (2200 psi), pressure increase by steps of 36 bar (520 psi) for screw turn
- 3** Pressure range 150÷350 bar (2200÷5100 psi); Std. setting 250 bar (3600 psi), pressure increase by steps of 90 bar (1300 psi) for screw turn

4 Seals

TYPE DESCRIPTION

- B** **NBR (Buna)+Polyurethane** o-ring seals, std configuration
- V** **FPM (Viton)** o-ring seals, contact Sales Dept

5 Valve body

TYPE CODE DESCRIPTION

- SAE10/2-SAE8** 3CC1020K11 Aluminium body for cavity 10 valve, SAE8 std thread
- SAE12/2-SAE10** 3CC1220L11 Aluminium body for cavity 12 valve, SAE10 std thread
- SAE16/2-SAE12** 3CC1620M11 Aluminium body for cavity 16 valve, SAE12 std thread

Note: aluminium body can stand up to 210 bar (3050 psi)

For steel bodies or different threading see from page 208

6 Springs

TYPE CODE DESCRIPTION

- 1** 3ML1081400 Pressure range **1** - white band
- 2** 3ML1081401 Pressure range **2** - no band
- 3** 3ML1081402 Pressure range **3** - red band

1 Cartridges

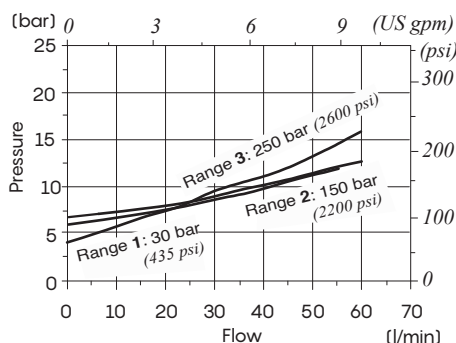
TYPE	CODE	DESCRIPTION
SAE cavity 10/2		
SW10A/OS2B	OSW10002000	Pressure range 2
SAE cavity 12/2		
SW12D/OS2B	OSW12002005	Pressure range 2
SAE cavity 16/2		
SW16A/OS2B	OSW16002000	Pressure range 2

2 Adjustments

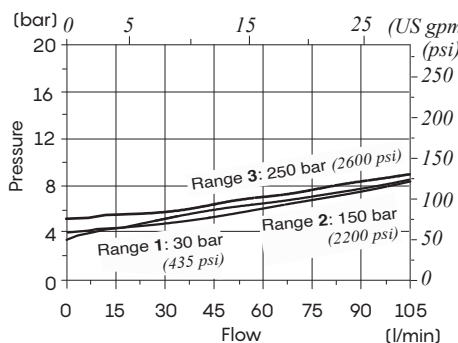
TYPE	DESCRIPTION
S	Screw

Rating diagrams
SW10A pressure vs. flow

std. setting at 5 l/min (1.32 US gpm)


SW12A pressure vs. flow

std. setting at 5 l/min (1.32 US gpm)


SW16A pressure vs. flow

std. setting at 5 l/min (1.32 US gpm)

